
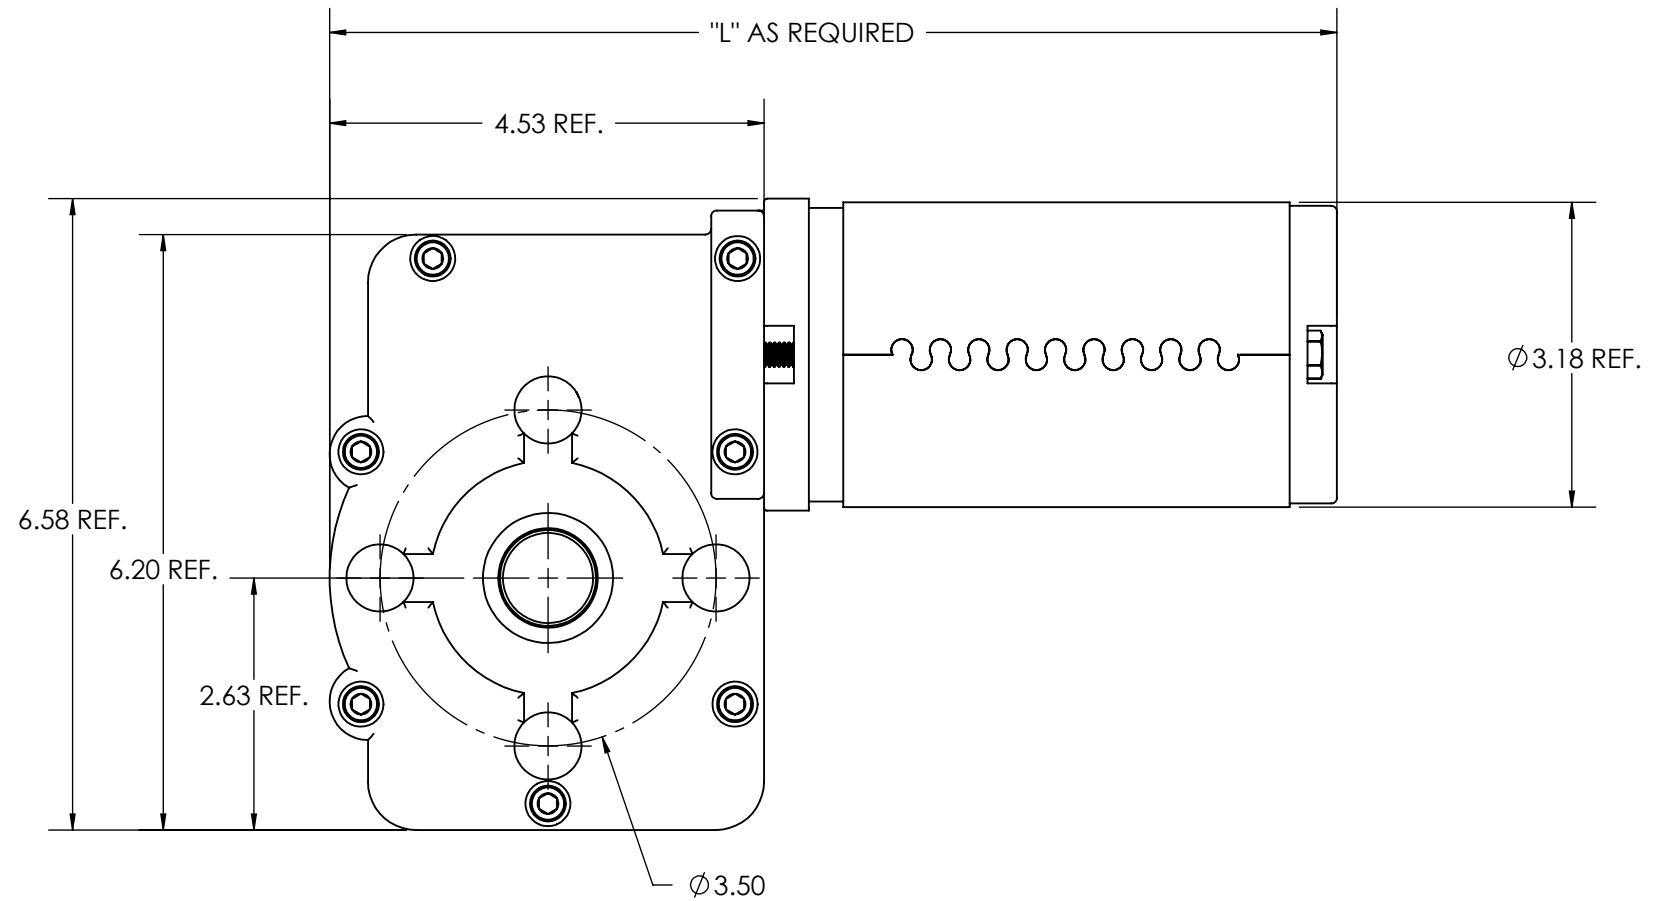



SPECIFICATIONS	
INPUT VOLTS	12 VDC - 240 VDC
OUTPUT SPEED	8-50 RPM
OUTPUT TORQUE	UP TO 500 IN-LBS, CONTINUOUS
GEAR RATIO	123.5:1
SHAFT DIA "ØD"	UP TO Ø 1.00 STD.
SHAFT EXT. "S"	AS REQUIRED
SHAFT FEATURE	FLAT, KEYWAY, OR AS REQUIRED
MOUNTING	FACE MOUNT AS SHOWN
BRUSHES	INTERNAL BRUSH CARD, OR REPLACEABLE BRUSHES
LEAD WIRES	AS REQUIRED
BEARINGS	BALL BEARINGS THROUGHOUT
INSULATION	UL CLASS H
MOTOR TYPE	SERIES DM32

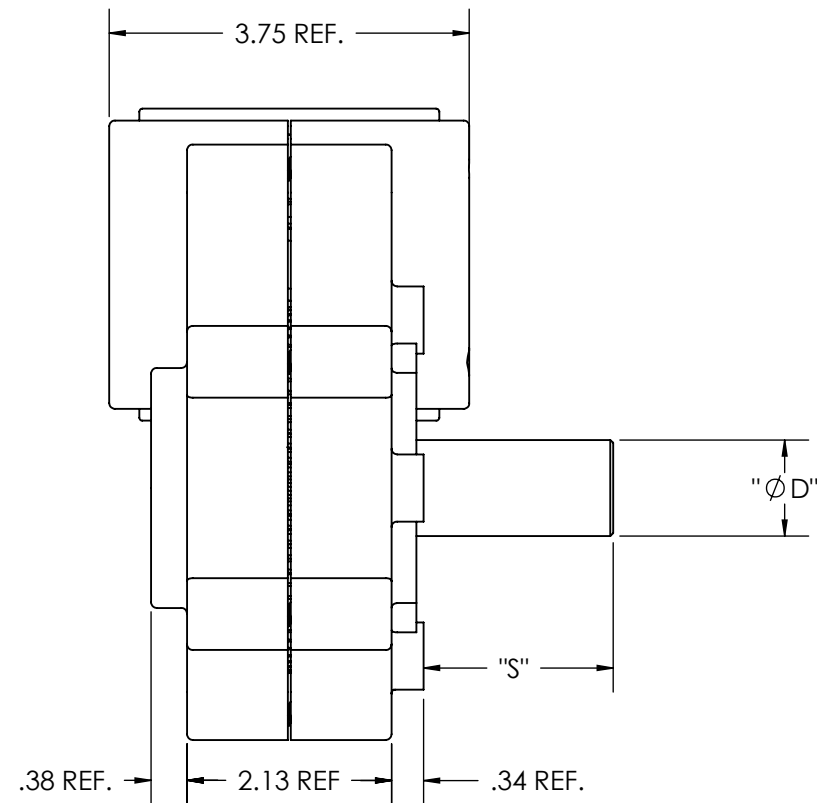

DESIGN APPROVAL	DATE	UNSPECIFIED TOLERANCES	This Drawing is the property of the Dumore Corporation. It must not be reproduced or copied without written permission.	 PART NO. DR500 DUMORE CORPORATION 1030 VETERANS ST. MAUSTON, WI 53948
DES. ENG.	2/8/2011	xxx ± .005		
MFG. ENG.		xx ± .015		
Q.C.		x ± .050		
SALES		MACHINE FINISH ± 1°		
DO NOT SCALE DRAWING		REMOVE ALL BURRS BREAK SHARP CORNERS	TITLE Ø 3.2" RIGHT ANGLE GEARMOTOR	
MATERIAL SPEC.		Req. per Piece	RECEIVED AS	DWG. BY
		Pattern No.	3-D AVAILABLE	CKD. BY
			DATE	DATE
				SCALE
				1:2