

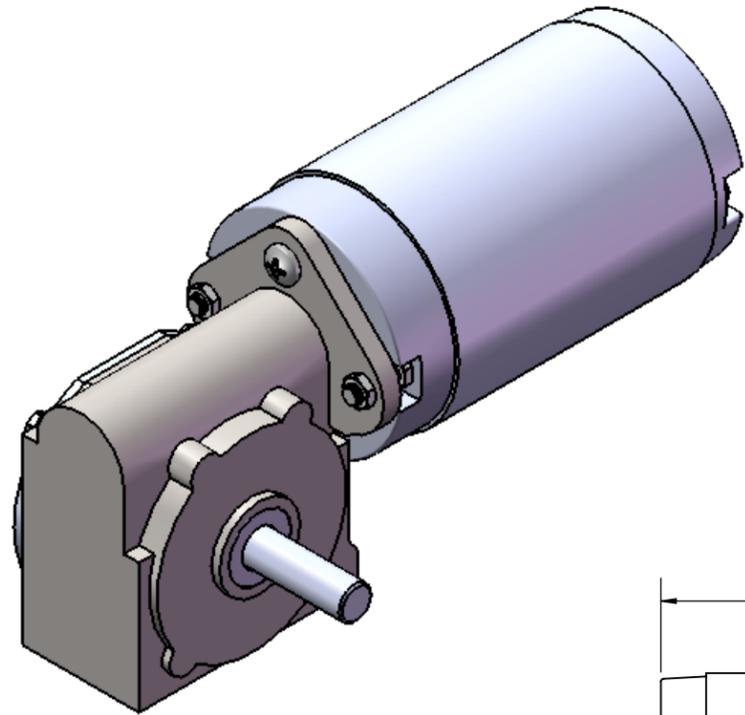
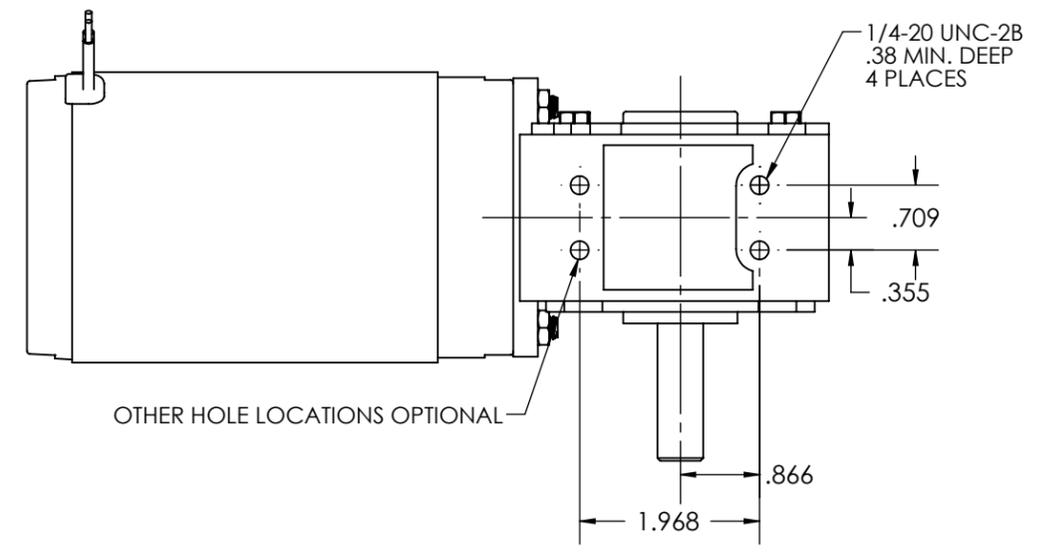


8 7 6 5 4 3 2 1

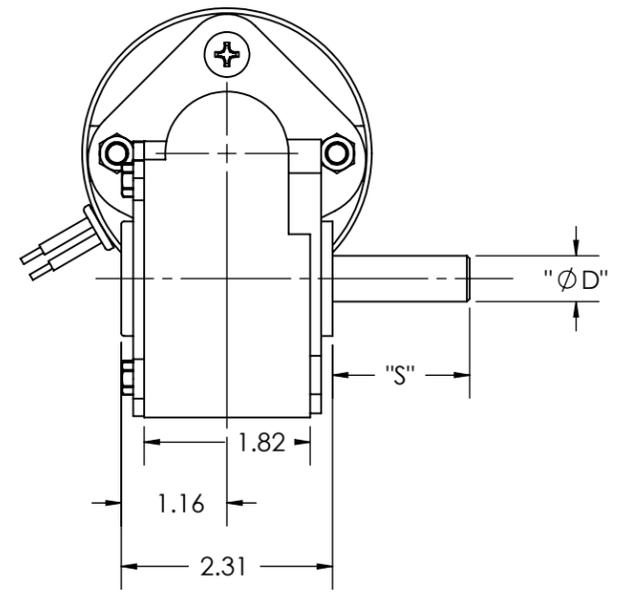

SPECIFICATIONS	
INPUT VOLTS	12 VDC - 240 VDC
OUTPUT SPEED	35-600 RPM
OUTPUT TORQUE	UP TO 60 IN-LBS, CONTINUOUS
GEAR RATIO	10:1, 12.3:1, 14.5:1, 30:1, 45:1, 58:1
SHAFT DIA "ØD"	Ø .500 STD.
SHAFT EXT. "S"	AS REQUIRED
SHAFT FEATURE	FLAT, KEYWAY, OR AS REQUIRED
MOUNTING	FACE, FOOT, OR AS REQUIRED
BRUSHES	INTERNAL BRUSH CARD, OR REPLACEABLE BRUSHES
LEAD WIRES	AS REQUIRED
BEARINGS	BALL BEARING, OUTPUT BEARING SUPPORT ON INPUT SHAFT
INSULATION	UL CLASS H
MOTOR TYPE	SERIES DM32

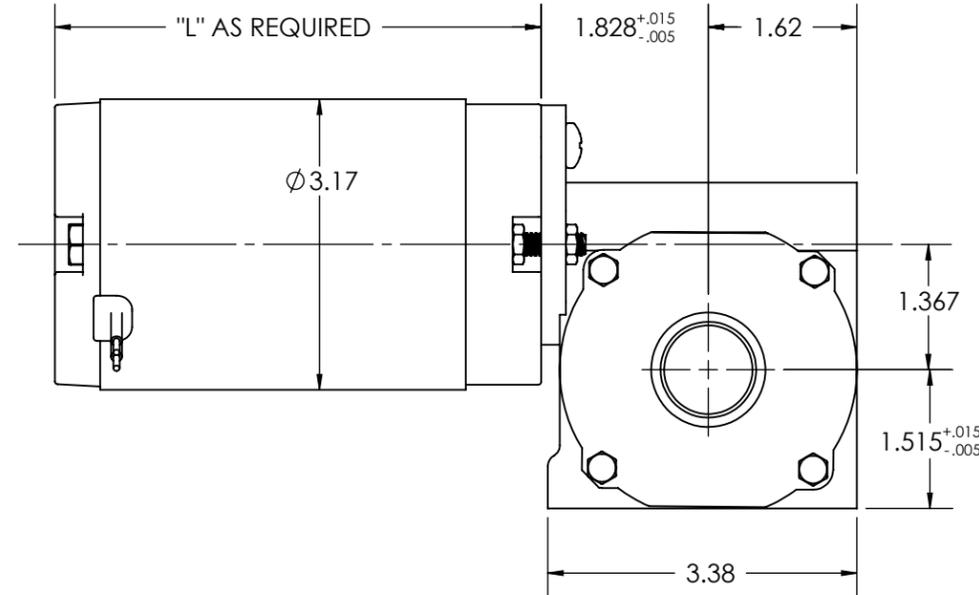

OTHER HOLE LOCATIONS OPTIONAL

REV.	DESCRIPTION	DATE	ECN
DESIGN APPROVAL	DATE	UNSPECIFIED TOLERANCES	This Drawing is the property of the Dumore Corporation. It must not be reproduced or copied without written permission.
DES. ENG.	2/14/2011	xxx ± .005	
MFG. ENG.		xx ± .015	
Q.C.		x MACHINE FINISH	
SALES		ANGLES ± 1°	
DO NOT SCALE DRAWING		REMOVE ALL BURRS BREAK SHARP CORNERS	TITLE
MATERIAL SPEC.		Req. per Piece	RECEIVED AS
		Pattern No.	3-D AVAILABLE
		DWG. BY	TAH
		DATE	2/14/2011
		CKD. BY	DATE
		SCALE	1:2


PART NO.
DR60
DUMORE CORPORATION
 1030 VETERANS ST. MAUSTON, WI 53948

8 7 6 5 4 3 2 1