
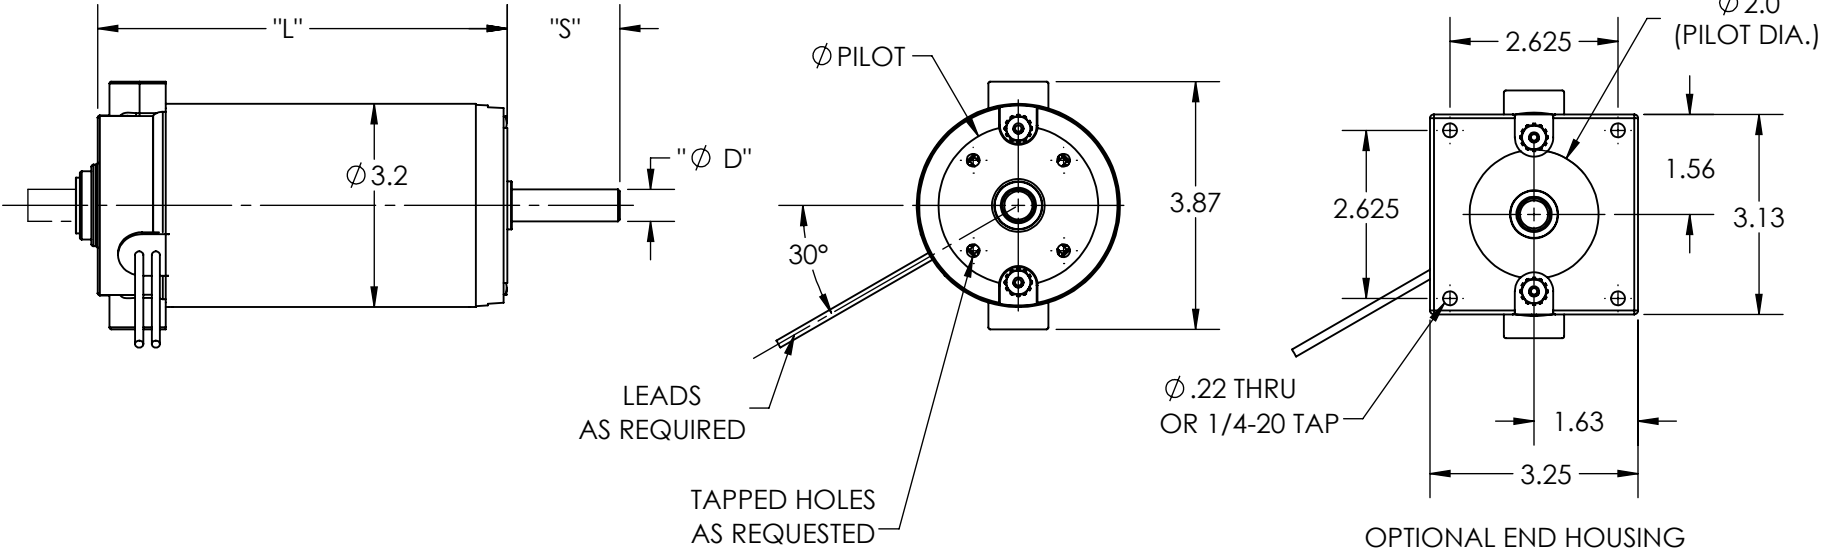



SPECIFICATIONS	
INPUT VOLTAGE	12 VDC / 240 VDC
OUTPUT SPEED	1000 TO 8000 RPM
OUTPUT H.P.	UP TO .5 H.P. CONTINUOUS
LENGTH "L"	4.0 / 8.0
SHAFT DIA. "Ø D"	UP TO Ø .500
SHAFT EXT. "S"	AS REQUESTED
SHAFT FEATURES	HOB, FLAT, KEYWAY, OR AS REQUESTED
MOUNTING	FACE OR FOOT MOUNTING
BRUSHES	INTERNAL BRUSH CARD, OR REPLACEABLE BRUSHES
POWER CONNECTION	AS REQUESTED
OUTPUT BEARING	BALL BEARING
VENTING	ENCLOSED / VENTED / FAN COOLED
INSULATION	UL CLASS H

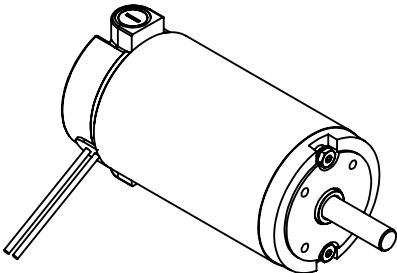

REV.		DESCRIPTION		DATE		ECN							
DESIGN APPROVAL		DATE		UNSPECIFIED TOLERANCES		<div><div></div><div>PART NO. DM32 DUMORE CORPORATION 1030 VETERANS ST. MAUSTON, WI 53948</div></div>							
DES. ENG.				.XXX ± .005 .XX ± .015 .X ± .050									
MFG. ENG.													
Q.C.				MACHINE FINISH ± 1° ANGLES .005 TIR CONCENTRICITY .001 PER IN. SQUARENESS									
SALES													
DO NOT SCALE DRAWING				REMOVE ALL BURRS BREAK SHARP CORNERS		TITLE 3.2" MOTOR							
MATERIAL SPEC.				Req. per Piece Pattern No.		RECEIVED AS		DWG. BY		DATE		SCALE	
								CRD. BY		DATE		1:2	