
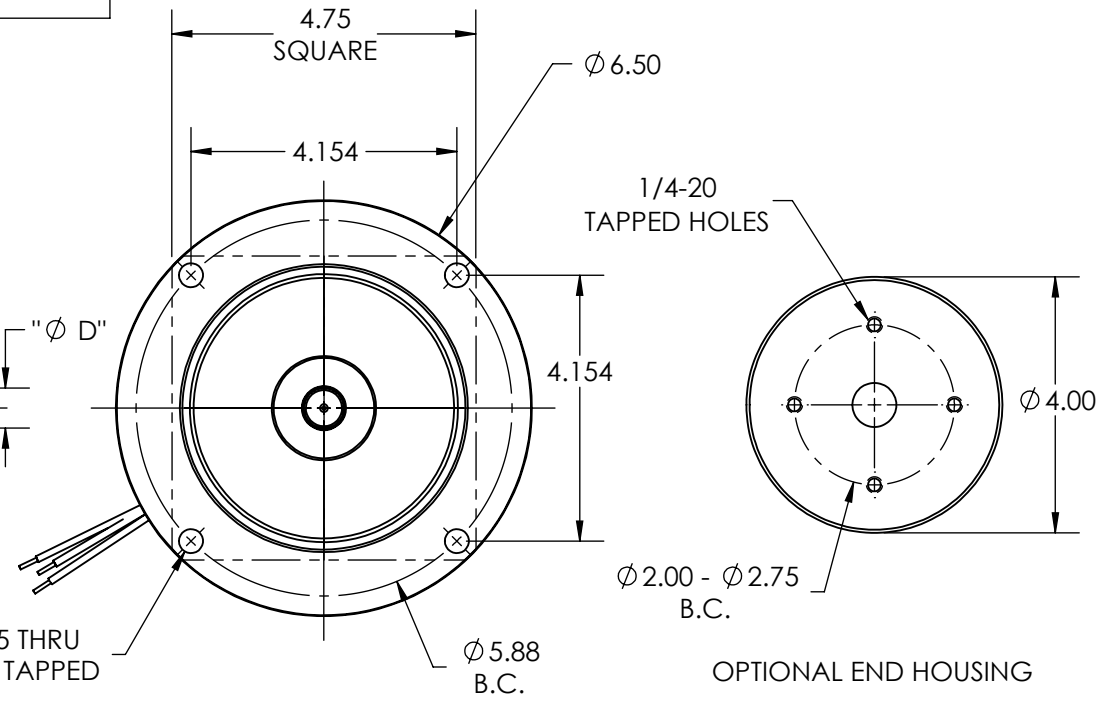
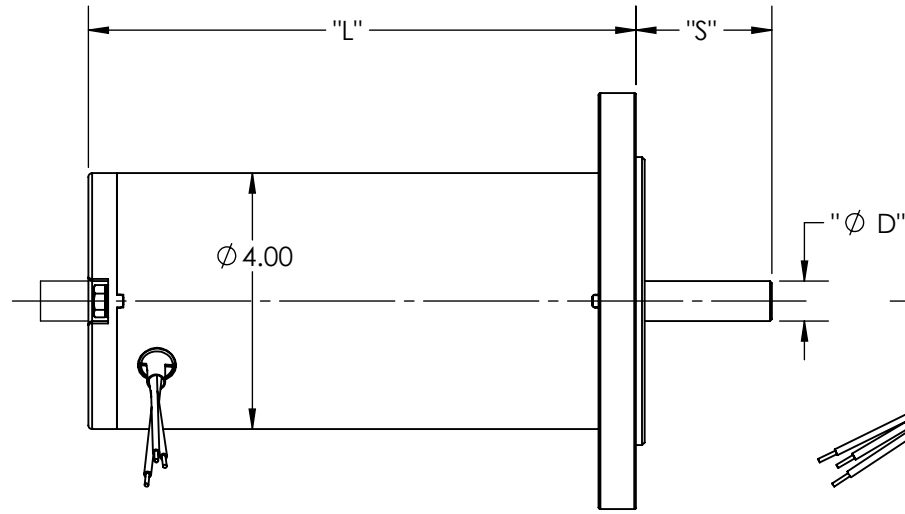


**SPECIFICATIONS**

INPUT VOLTAGE	12 VDC - 240 VDC
OUTPUT SPEED	1000 TO 8000 RPM
OUTPUT H.P.	UP TO .75 H.P. CONTINUOUS
LENGTH "L"	5.60 / 8.75
SHAFT DIA. "D"	UP TO $\phi$ 1.00
SHAFT EXT. "S"	AS REQUESTED
SHAFT FEATURES	HOB, FLAT, KEYWAY, OR AS REQUESTED
MOUNTING	56 C-FACE MOUNT, FOOT MOUNT
BRUSHES	INTERNAL BRUSH CARD, OR REPLACEABLE BRUSHES
POWER CONNECTION	AS REQUIRED
OUTPUT BEARING	BALL BEARING
VENTING	ENCLOSED / VENTED / FAN COOLED
INSULATION	UL CLASS H

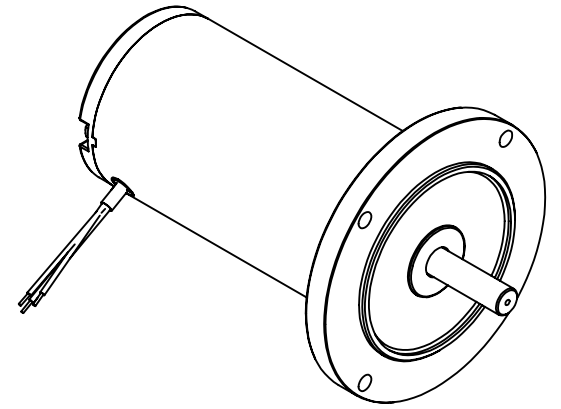

4X  $\phi$ .375 THRU  
OR 3/8-16 TAPPED

$\phi$  5.88  
B.C.

OPTIONAL END HOUSING

REV.	DESCRIPTION	DATE	ECN
------	-------------	------	-----

DESIGN APPROVAL	DATE
DES. ENG.	
MFG. ENG.	
Q.C.	
SALES	

UNSPECIFIED TOLERANCES	
.XXX	$\pm$ .005
.XX	$\pm$ .015
.X	$\pm$ .050
MACHINE FINISH	
ANGLES	$\pm$ 1°
CONCENTRICITY	.005 TIR
SQUARENESS	.001 PER IN.

This Drawing is the property of the Dumore Corporation. It must not be reproduced or copied without written permission.



PART NO.	DM40
<b>DUMORE CORPORATION</b>	
1030 VETERANS ST. MAUSTON, WI 53948	

DO NOT SCALE DRAWING	REMOVE ALL BURRS BREAK SHARP CORNERS	TITLE	MOTOR ASSEMBLY, DM40		
MATERIAL SPEC.	Req. per Piece	RECEIVED AS	DWG. BY	DATE	SCALE
	Pattern No.		CRD. BY	DATE	1:3