



SPECIFICATIONS	
INPUT VOLTAGE	12 - 230 VDC
OUTPUT SPEED	40 - 500 RPM
OUTPUT TORQUE	UP TO 1200 IN-LB
GEAR RATIO	12:1 TO 50:1
LENGTH "L"	5.60 / 8.75
SHAFT DIA. "Ø D"	UP TO Ø .75
SHAFT EXT. "S"	AS REQUESTED
SHAFT FEATURE	HOB, FLAT, KEYWAY, OR AS REQUESTED
MOUNTING	BASE OR FACE MOUNTING WITH STUDS
BRUSHES	INTERNAL BRUSH CARD OR REPLACEABLE
LEAD WIRES	AS REQUESTED
BEARINGS	BALL BEARING
VENTING	ENCLOSED / VENTED / FAN COOLED
INSULATION	UL CLASS H
MOTOR TYPE	DM 40

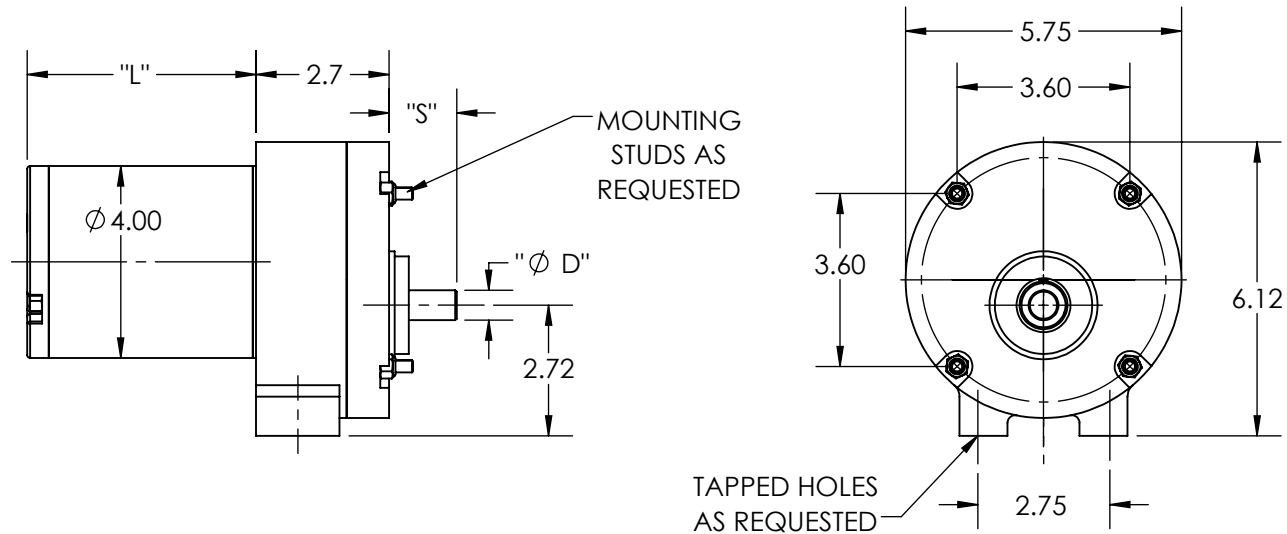

REV.	DESCRIPTION	DATE	ECN
DESIGN APPROVAL	DATE	UNSPECIFIED TOLERANCES	
DES. ENG.		.XXX	± .005
MFG. ENG.		.XX	± .015
Q.C.		.X	± .050
SALES		MACHINE FINISH	± 1°
		ANGLES	.005 TIR
		CONCENTRICITY	.001 PER IN.
		SQUARENESS	
DO NOT SCALE DRAWING		REMOVE ALL BURRS BREAK SHARP CORNERS	
MATERIAL SPEC.		TITLE	
		PARALLEL SHAFT GEARMOTOR	
		RECEIVED AS	
		Req. per Piece	DWG. BY
		Pattern No.	DATE
			CRD. BY
			DATE
			SCALE
			1:4

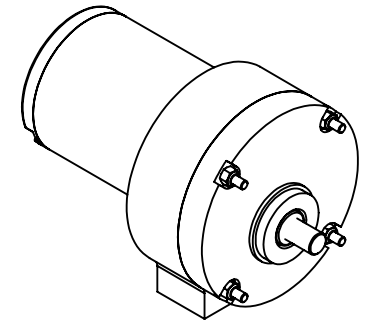

PART NO.

DP500

DUMORE CORPORATION

1030 VETERANS ST. MAUSTON, WI 53948

This Drawing is the property of the Dumore Corporation. It must not be reproduced or copied without written permission.