
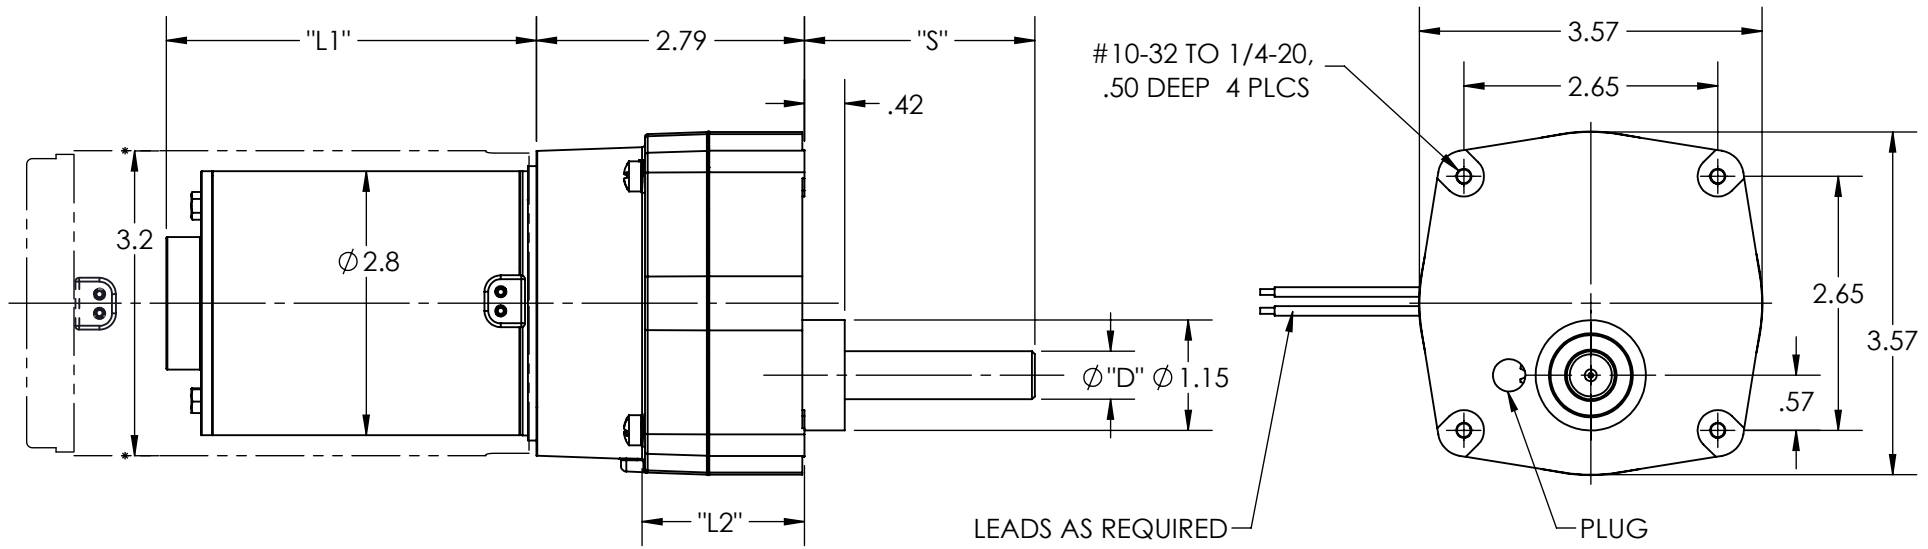



SPECIFICATIONS	
INPUT VOLTAGE	12 VDC - 240 VDC
OUTPUT SPEED	1 - 1200 RPM
OUTPUT TORQUE	UP TO 300 IN-LBS
GEAR RATIO	10:1 - 170:1
LENGTH "L1"	3.75 / 8.00
LENGTH "L2"	2.46 / 2.79
SHAFT DIA. "ØD"	UP TO Ø .500
SHAFT EXT. "S"	AS REQUESTED
SHAFT FEATURE	HOB, FLAT, KEYWAY, OR AS REQUESTED
MOUNTING	FACE, FOOT, OR AS REQUIRED
BRUSHES	INTERNAL BRUSH CARD, OR REPLACEABLE BRUSHES
LEAD WIRES	AS REQUESTED
BEARINGS	NEEDLE ROLLER BEARING OR SLEEVES
VENTING	ENCLOSED / VENTED / FAN COOLED
INSULATION	UL CLASS H
MOTOR TYPE	SERIES DM28, OR DM32

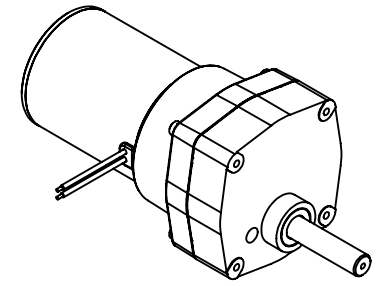

REV.	DESCRIPTION	DATE	ECN
------	-------------	------	-----

DESIGN APPROVAL	DATE	UNSPECIFIED TOLERANCES	This Drawing is the property of the Dumore Corporation. It must not be reproduced or copied without written permission.	 PART NO. <b>DP60</b> <b>DUMORE CORPORATION</b> 1030 VETERANS ST. MAUSTON, WI 53948
DES. ENG.		.XXX ± .005		
MFG. ENG.		.XX ± .015		
Q.C.		.X ± .050		
SALES		MACHINE FINISH ± 1°		
DO NOT SCALE DRAWING		REMOVE ALL BURRS BREAK SHARP CORNERS	TITLE	
MATERIAL SPEC.		Req. per Piece	RECEIVED AS	DWG. BY
		Pattern No.		DATE
				DATE
				SCALE
				1:2